



深圳德彩光电有限公司
Shenzhen Dicolor Optoelectronics Co.,Ltd

LED模组规格书

LED MODULE SPECIFICATION

编号 (NO.):	DI-P12F1D
类型 (Type):	Outdoor LED Module
间距 (Pitch):	12.0 mm
驱动 (Driving):	1/4 virtual Duty
版本 (Version):	1.0



请避免重物挤压灯面!



小心静电损坏LED!



非专业人员请勿维修!

地址: 深圳市宝安区福永镇永和路德彩工业园
Address: Dicolor Industry Park, Yonghe Road, Fuyong town, Bao'an District, Shenzhen, China
电话(Tel): 0086-755-29604770/29604771/29604749 传真(Fax): 0086-755-29604042
网址(Web): [Http://www.dicolor.cn](http://www.dicolor.cn) 邮编(Post code): 518103





DI-P12F1D

户外模组 (OUTDOOR MODULE)


单位 / Unit : mm



FRONT VIEW

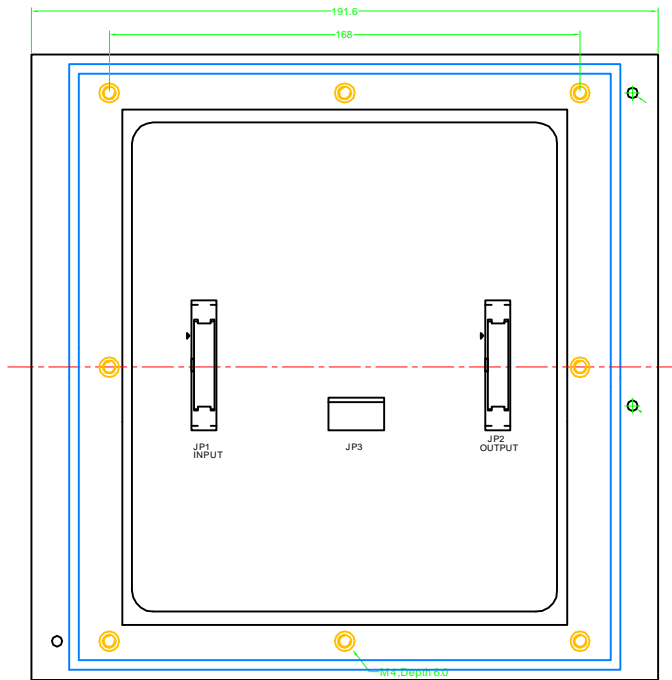

BACK VIEW

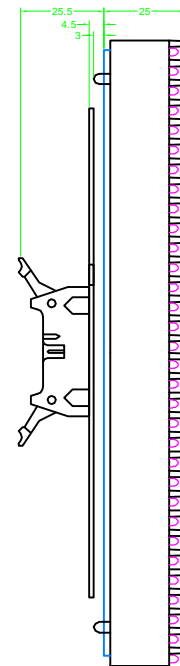

SIDE VIEW

Pin Assignment (Data JP1/JP2 - F.C.16)

Pin NO.	Function	Pin NO.	Function
1	R0	2	R00
3	G0	4	B0
5	R1	6	R11
7	G1	8	B1
9	R2	10	R22
11	G2	12	B2
13	R3	14	R33
15	G3	16	B3
17	ALK	18	GND
19	LAT	20	GND
21	OE	22	GND
23	A	24	B

Pin Assignment (Power JP3 - CH5)

Pin NO.	Function
1	VDD
2	VDD
3	VCC
4	GND
5	GND



DI-P12F1D


户外模组 (OUTDOOR MODULE)

主要技术指标
MAIN SPECIFICATIONS

(温度条件 Ta = 25°C)

项目 (ITEM)	参数 DESCRIPTION
像素间距 (Pixel Pitch)	Pitch 12 mm
显示分辨率 (Display resolution)	16 x 16 Dots
像素基色 (Pixel configuration)	2R, 1 G, 1 B
物理密度 (Physical density)	6944 (pixels / m)
驱动方式 (Driving Method)	1/4 virtual Duty
外形尺寸 (Panel size)	191.6x191.6mm
灰度等级 (Gray scale)	16384
显示亮度 (Brightness)	3500 ± 10% Nit
模组视角 (Viewing angle)	H:110° / V:60°
最佳视距 (Option distance)	> 9 M
LED封装 (LED Encapsulation)	DIP 346
LED波长 (LED Wavelength)	R:620~630nm G:520~530nm B:465~475nm
工作电压 (Working Voltage)	DC 5 V
使用功耗 (Working Consumption)	24W
使用寿命 (Life Time)	100,000 Hours
环境温度 (Environment Temperature)	-20°C ~ 60°C
外壳材质 (Material of Module Outside Frame)	PC

数据传输原理图
Drive Data Register Direction

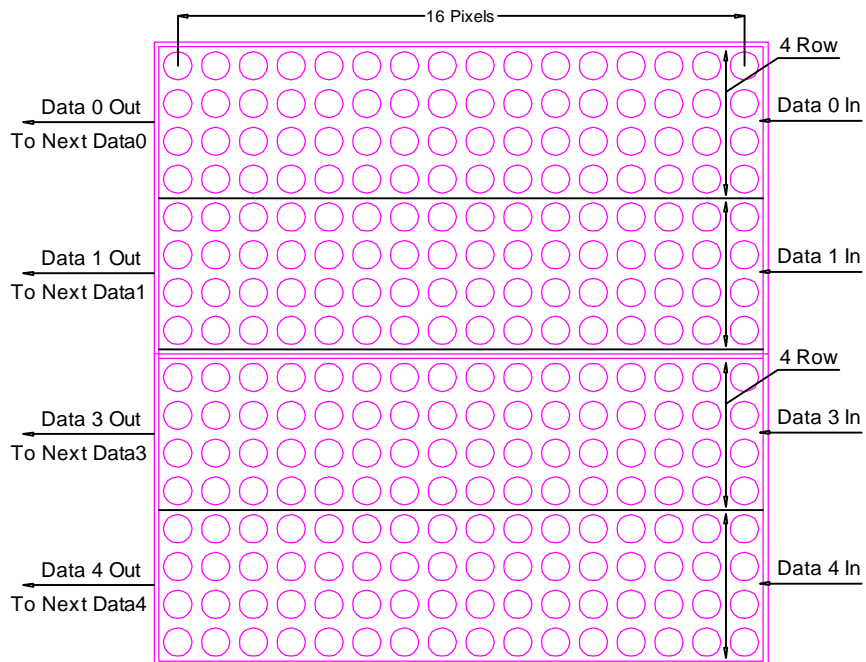

FRONT VIEW (LAMP VIEW)