



深圳德彩光电有限公司
Shenzhen Dicolor Optoelectronics Co.,Ltd

LED模组规格书

LED MODULE SPECIFICATION

编号 (NO.):	DI-P22F1D
类型 (Type):	Outdoor LED Module
间距 (Pitch):	22.0 mm
驱动 (Driving):	Static virtual Duty
版本 (Version):	1.0



请避免重物挤压灯面!



小心静电损坏LED!



非专业人员请勿维修!

地址: 深圳市宝安区福永镇永和路德彩工业园

Address: Dicolor Industry Park, Yonghe Road, Fuyong town, Bao'an District, Shenzhen, China

电话(Tel): 0086-755-29604770/29604771/29604749

传真(Fax): 0086-755-29604042

网址(Web): [Http://www.dicolor.cn](http://www.dicolor.cn)

邮编(Post code): 518103




深圳德彩光电有限公司

Shenzhen Dicolor Optoelectronics Co.,Ltd



DI-P22F1D

户外模组 (OUTDOOR MODULE)


单位 / Unit : mm

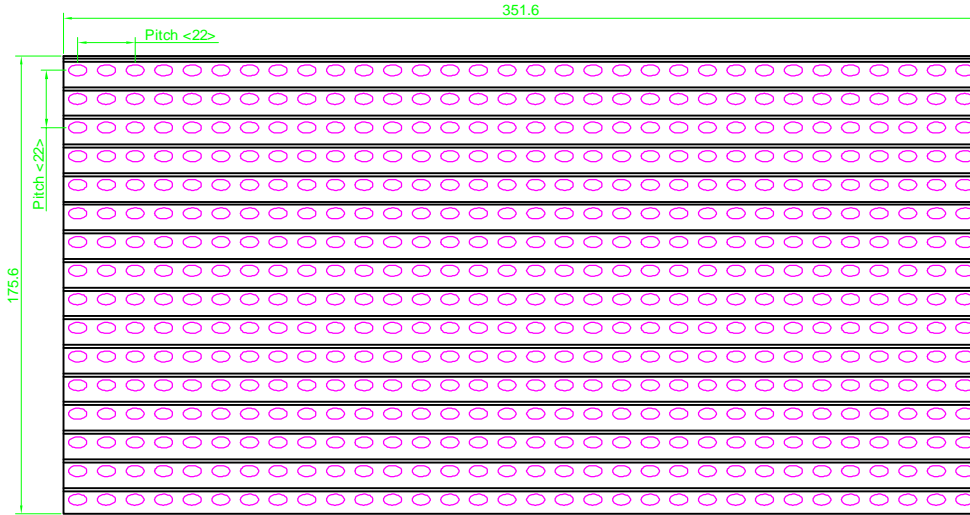

FRONT VIEW

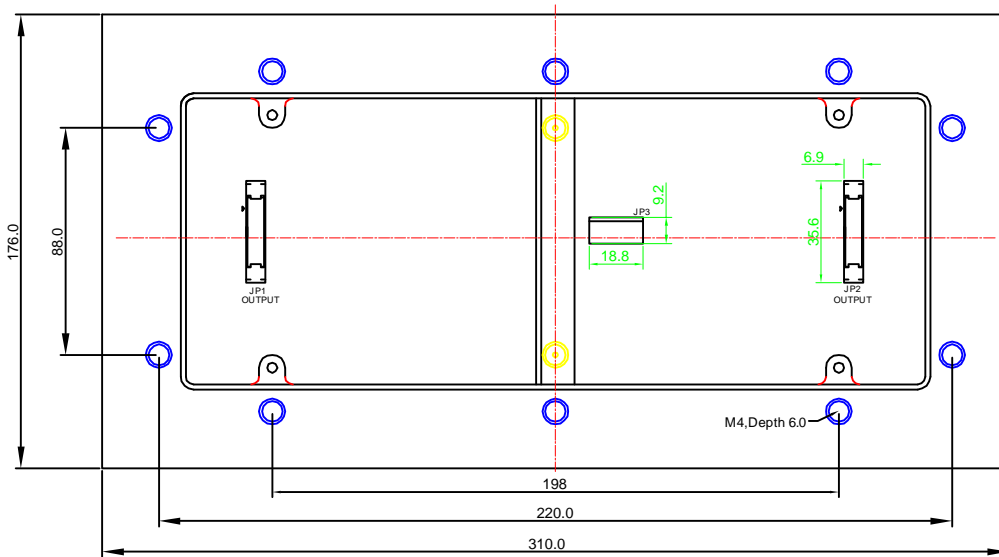

BACK VIEW

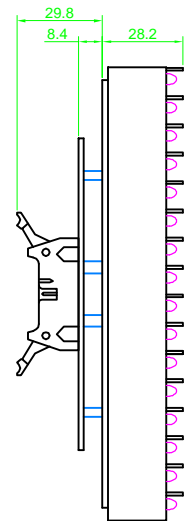

SIDE VIEW

Pin Assignment (Data JP1/JP2 - F.C.16)

Pin NO.	Function	Pin NO.	Function
1	1R0	2	2R0
3	G0	4	B0
5	1R1	6	2R1
7	G1	8	B1
9	CLK	10	GND
11	LAT	12	GND
13	OE	14	GND
15	GND	16	GND

Pin Assignment (Power JP3 - CH5)

Pin NO.	Function
1	VDD
2	VDD
3	VCC
4	GND
5	GND



深圳德彩光电有限公司

Shenzhen Dicolor Optoelectronics Co.,Ltd

DI-P22F1D

户外模组 (OUTDOOR MODULE)


主要技术指标
MAIN SPECIFICATIONS

(温度条件 Ta = 25°C)

项目 (ITEM)	参数 DESCRIPTION		
像素间距 (Pixel Pitch)	Pitch 18 mm		
显示分辨率 (Display resolution)	16 x 8 Dots		
像素基色 (Pixel configuration)	2R, 1 G, 1 B		
物理密度 (Physical density)	2067 (pixels / m ²)		
驱动方式 (Driving Method)	Static virtual Duty		
外形尺寸 (Panel size)	351.6x175.6mm		
灰度等级 (Gray scale)	16384		
显示亮度 (Brightness)	5000 ± 10% Nit		
模组视角 (Viewing angle)	H:110° / V:60°		
最佳视距 (Option distance)	> 16M		
LED封装 (LED Encapsulation)	DIP 546		
LED波长 (LED Wavelength)	R:620~630nm	G:520~530nm	B:465~475nm
工作电压 (Working Voltage)	DC 5 V		
使用功耗 (Working Consumption)	38W		
使用寿命 (Life Time)	100,000 Hours		
环境温度 (Environment Temperature)	-20°C ~ 60°C		
外壳材质 (Material of Module Outside Frame)	PC		

数据传输原理图

Drive Data Register Direction

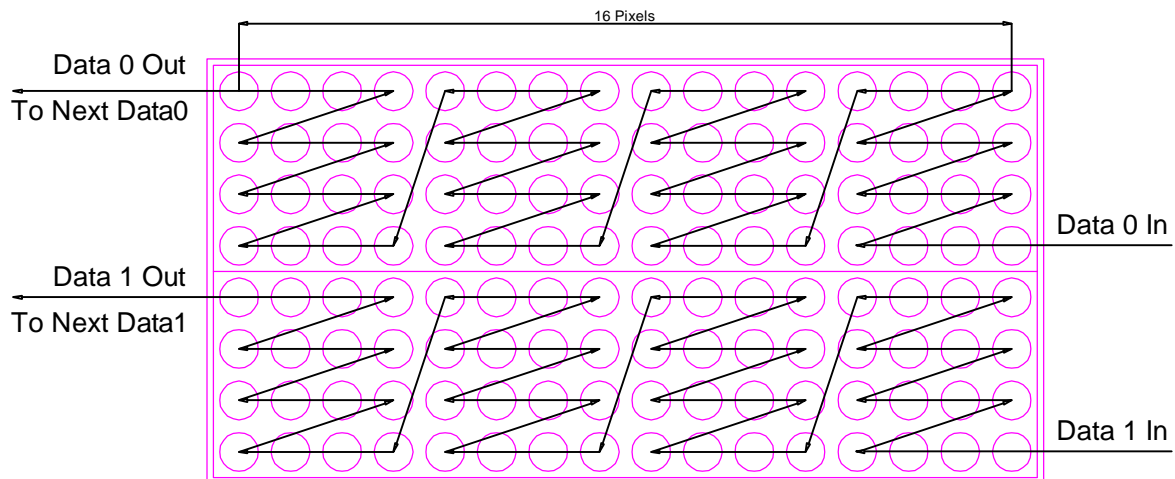

FRONT VIEW (LAMP VIEW)